

Standard specifications

MG10HL*E58

1st Edition : January 18, 2019

KAWASAKI HEAVY INDUSTRIES, LTD.

ROBOT DIVISION

| | |
|-----------------|---------------|
| Specification : | 90101-2584DEA |
| (Arm) : | 90151-0158DEC |
| (Controller) : | 90152-0052DEA |


*...F,G,R,S...

1. Specification of Robot





| [1] Robot Arm | | | |
|---------------------------|--|----------------------|------------------------|
| 1. Model | MG10HL-B | | |
| 2. Type | Articulated robot | | |
| 3. Degree of freedom | 6 axes | | |
| 4. Axis specification | Operating axis | Max. operating range | Max. speed |
| | Arm rotation (JT1) | +150° ~ -150° | 65° /s |
| | Arm out-in (JT2) | +90° ~ -40° | 33.5° /s |
| | Arm up-down (JT3) | +30° ~ -110° | 37.5° /s |
| | Wrist swivel (JT4) | ±360° | 65° /s |
| | Wrist bend (JT5) | ±120° | 65° /s |
| Wrist twist (JT6) | ±360° | 80° /s | |
| 5. Repeatability | ±0.10 mm (at the tool mounting surface) | | |
| 6. Max. payload | 1000 kg | | |
| 7. Max. applying force | 15000 N The value depends on usage conditions. If detailed data is required for your application, please contact Kawasaki. | | |
| 8. Max. speed | 5000 mm/s (at the tool mounting surface) * It isn't linear motion speed. | | |
| 9. Load capacity of wrist | | Max. torque | Moment of inertia* |
| | JT4 | 8800 N·m | 1800 kg·m ² |
| | JT5 | 8800 N·m | 1800 kg·m ² |
| | JT6 | 4410 N·m | 1200 kg·m ² |
| | Note* Value in this table shows allowable moment of inertia of JT4/JT5/JT6 when max. allowed torque is applied to the axis. If more detailed data is required for your application, please contact Kawasaki. | | |
| 10. Driving motor | Brushless AC Servomotor | | |
| 11. Position detector | Absolute encoder | | |
| 12. Working range | See attached drawing | | |
| 13. Mass | 6500 kg (without options) | | |
| 14. Color | Munsell 10GY9/1 equivalent | | |
| 15. Installation | Floor mounting | | |
| 16. Environment cond. | (Temperature) 0 ~ 45 °C, (Humidity) 35 ~ 85 %, no dew, nor frost allowed | | |
| 17. Options | | | |
| Color | Color (Munsell) | | |
| Mechanical stopper | JT1 | | |
| Solenoid valves | Double solenoid valve ×2 Double solenoid valve×3 | | |
| Option harness | Type C0, Type H0(NPN), Type H0(PNP), Type E0(NPN), Type E0(PNP), | | |
| Air cleaning equipment | Filter, Regulator, Mistseparator | | |
| 18. Others | Consult Kawasaki about maintenance parts and spare parts. Consult Kawasaki about your application because the motor could become high temperature depending on your application. | | |

| [2] Controller | | |
|-----------------------------------|---|---|
| 1. Model | E58 | |
| 2. Enclosure | Enclosed structure / Indirect cooling system | |
| 3. Dimensions | See attached drawing | |
| 4. Number of controlled axes | 9 axes Max.15 axes (external additional amplifier, option) | |
| 5. Servo control and drive system | Full Digital Servo System | |
| 6. Type of control | Teach mode | Joint, Base, Tool, Fixed Tool (option) operation mode |
| | Repeat mode | Joint, Linear, Circular (option) interpolation |
| 7. Teaching method | Teaching or AS language programming | |
| 8. Memory capacity | 8 MB | |
| 9. External operation signals | External Emergency stop, External Hold, etc. | |
| 10. General purpose signals | Input signals | 32 channels (Includes dedicated signals) |
| | Output signals | 32 channels (Includes dedicated signals) |
| 11. Operation panel | Teach/Repeat SW, Emergency Stop SW, Control power lamp | |
| 12. Cable length | Power/Signal cable | 5m |
| | Teach Pendant cable | 5m |
| 13. Mass | See attached drawing | |
| 14. Power requirement | AC200 - AC220 V±10%, 50/60 Hz, 3 phases, Max 15 kVA | |
| 15. Ground | Less than 100 Ω (robot dedicated ground) Leakage current: max. 100 mA | |
| 16. Ambient temperature | 0 - 45 °C | |
| 17. Relative humidity | 35 - 85% (non-condensation) | |
| 18. Color | Munsell: 10GY9/1 equivalent | |
| 19. Teach Pendant | TFT color display (5.7 inch LCD) with touch panel Emergency Stop SW, Teach Lock SW and Enable SW | |
| 20. Motor brake release | Manual brake release switch | |
| 21. Safety Circuit | Category: 4, Performance Level: e (EN ISO13849-1) ★ | |
| 22. Options | | |
| General purpose signals | Input signals | 64/96/128 channels |
| | Output signals | 64/96/128 channels |
| I/O connector | D-SUB 37pin (male, female) with cover | |
| Operation panel | Motor Power ON, Cycle start, RUN/HOLD, Error reset, Error lamp | |
| Power/Signal cable | 10 m, 15 m | |
| Teach Pendant cable | 10 m, 15 m | |
| Auxiliary storage | USB memory | |
| Transformer | AC380V-415V / AC440V-480V by tap selection | |
| PC cable | 1.5 m, 3 m | |
| Extended safety functions | Cubic-S (Motion area monitoring, Joint monitoring, Speed monitoring etc.) | |
| Teach Pendant option | Teach Pendant Stand, Cable hook, connector for TP less | |
| Fast check mode | Fast check mode Switch | |
| Others | Cooler, LED Light, Field BUS, Software PLC, Analog input/output, Conveyor Synchronization | |
| 23. Others | Consult Kawasaki about maintenance parts and spare parts. | |

★ Category and Performance level (PL) are determined by the whole system and conditions.
The safety circuit of this controller is available in the system of category: up to 4, PL: up to e.

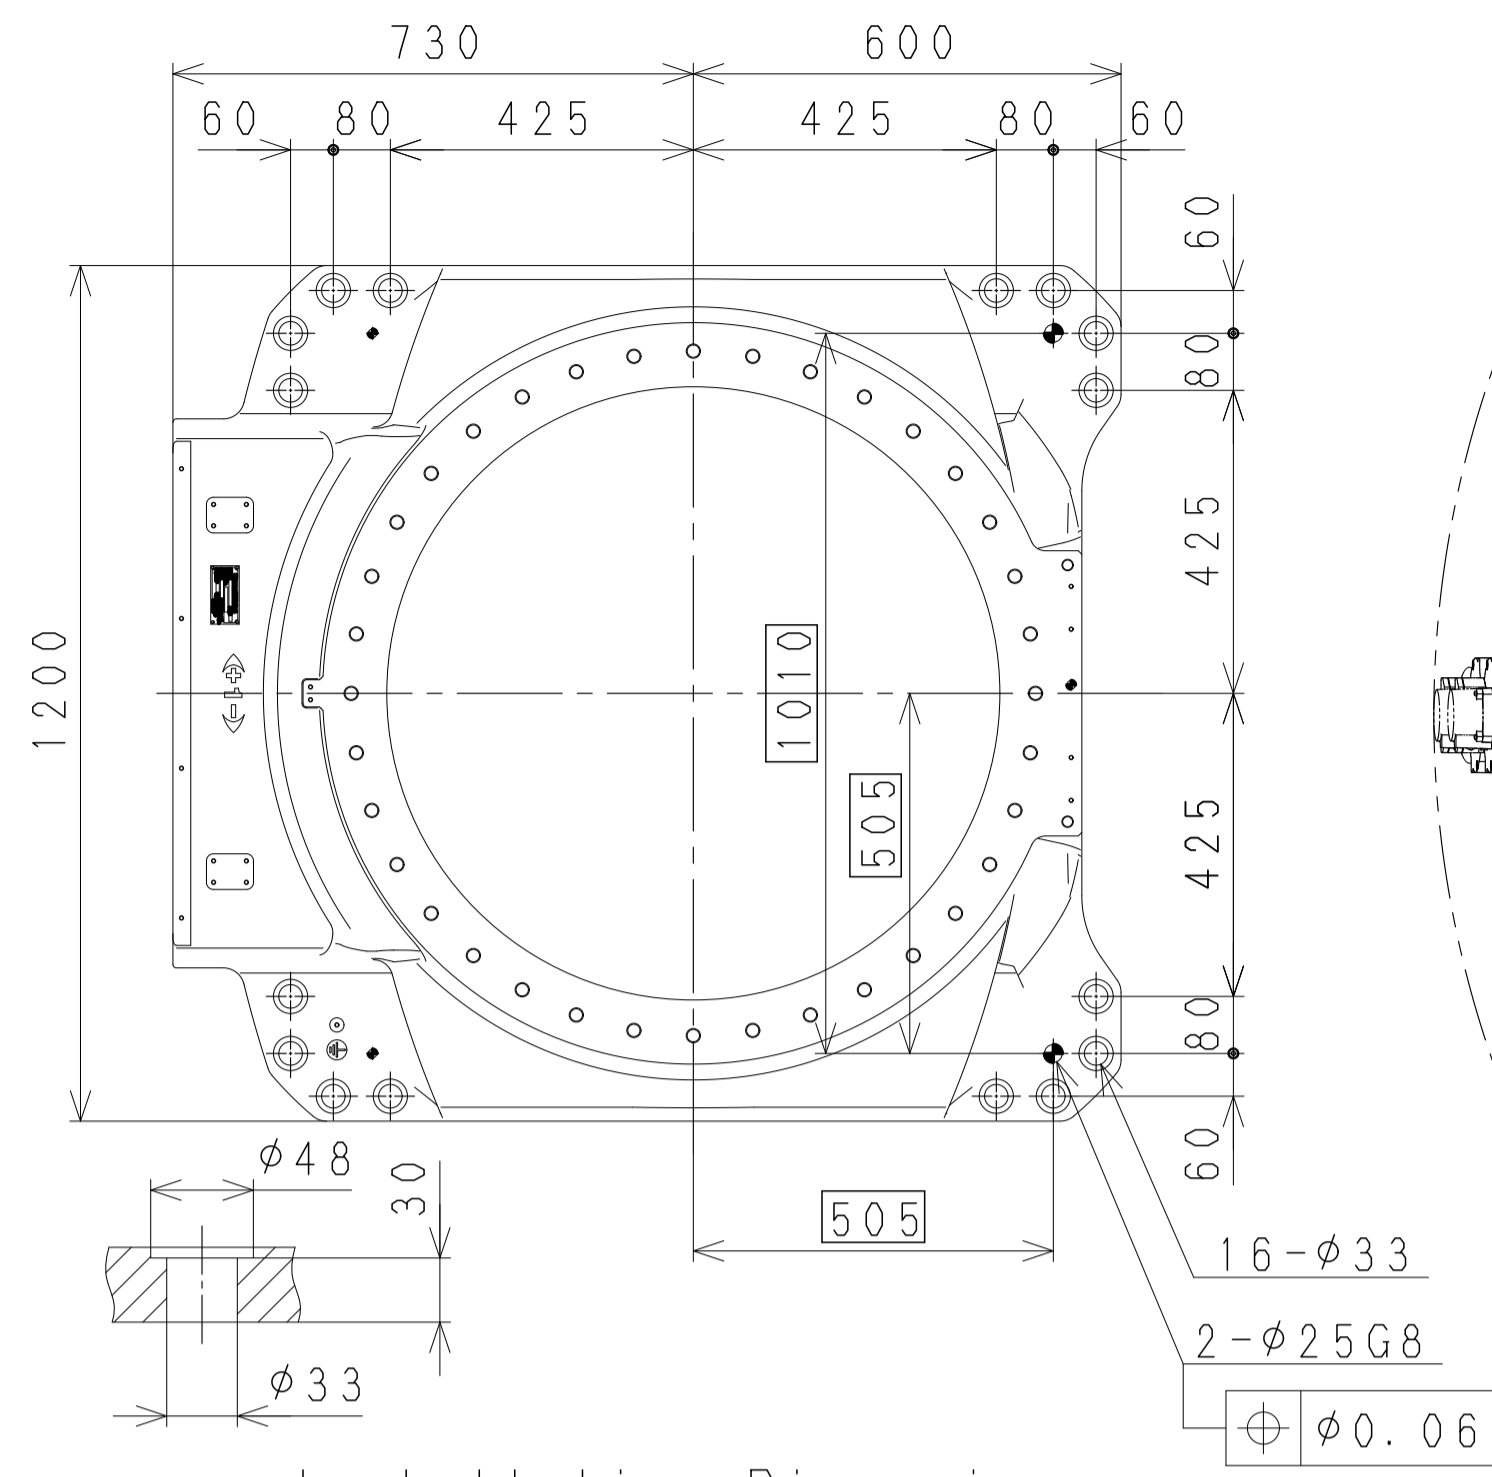

Installation Dimensions

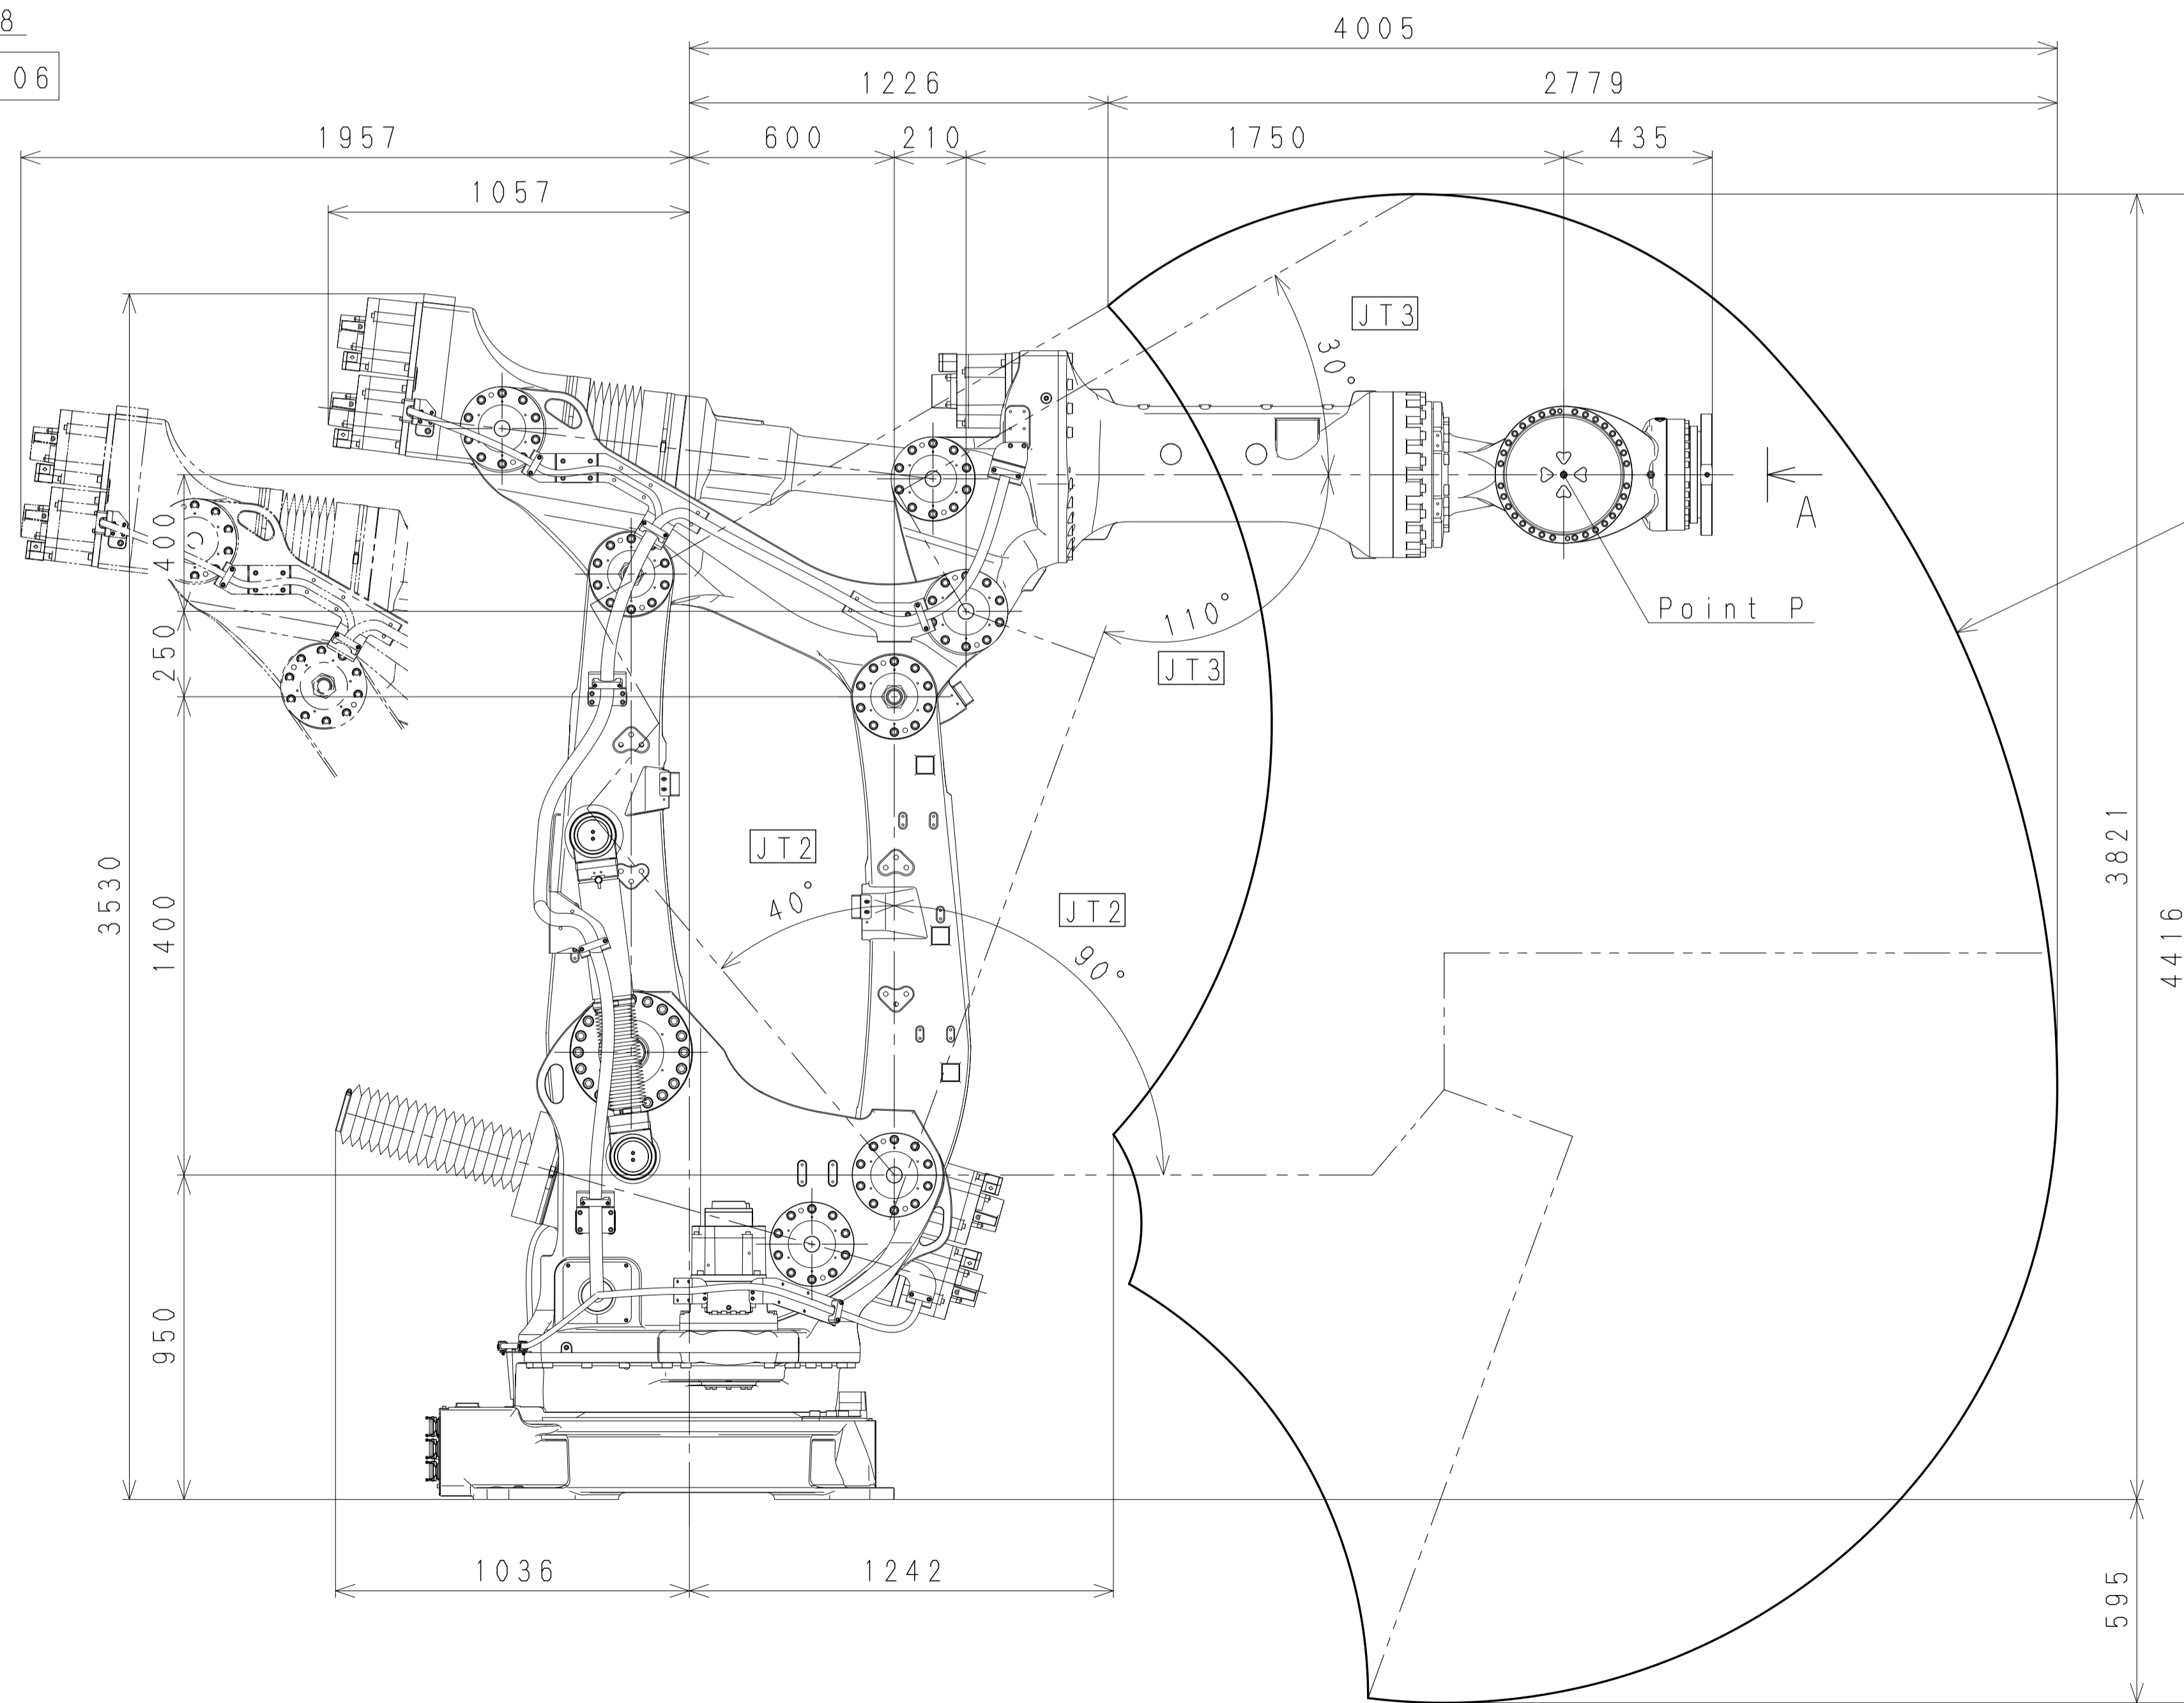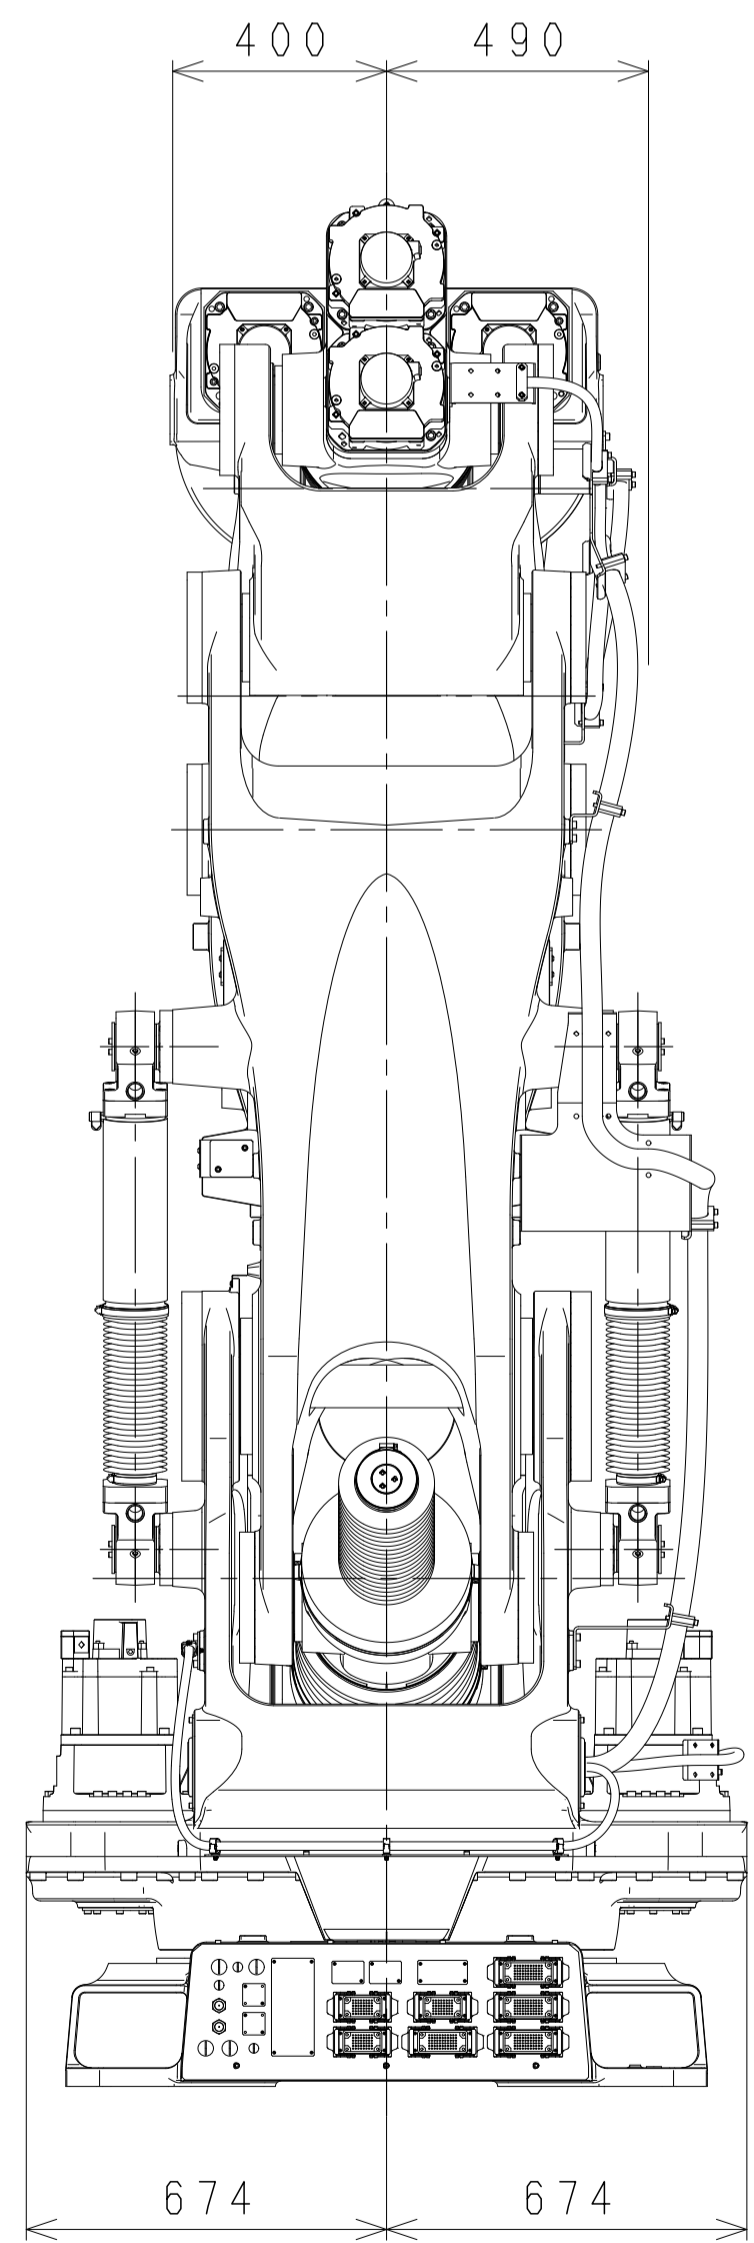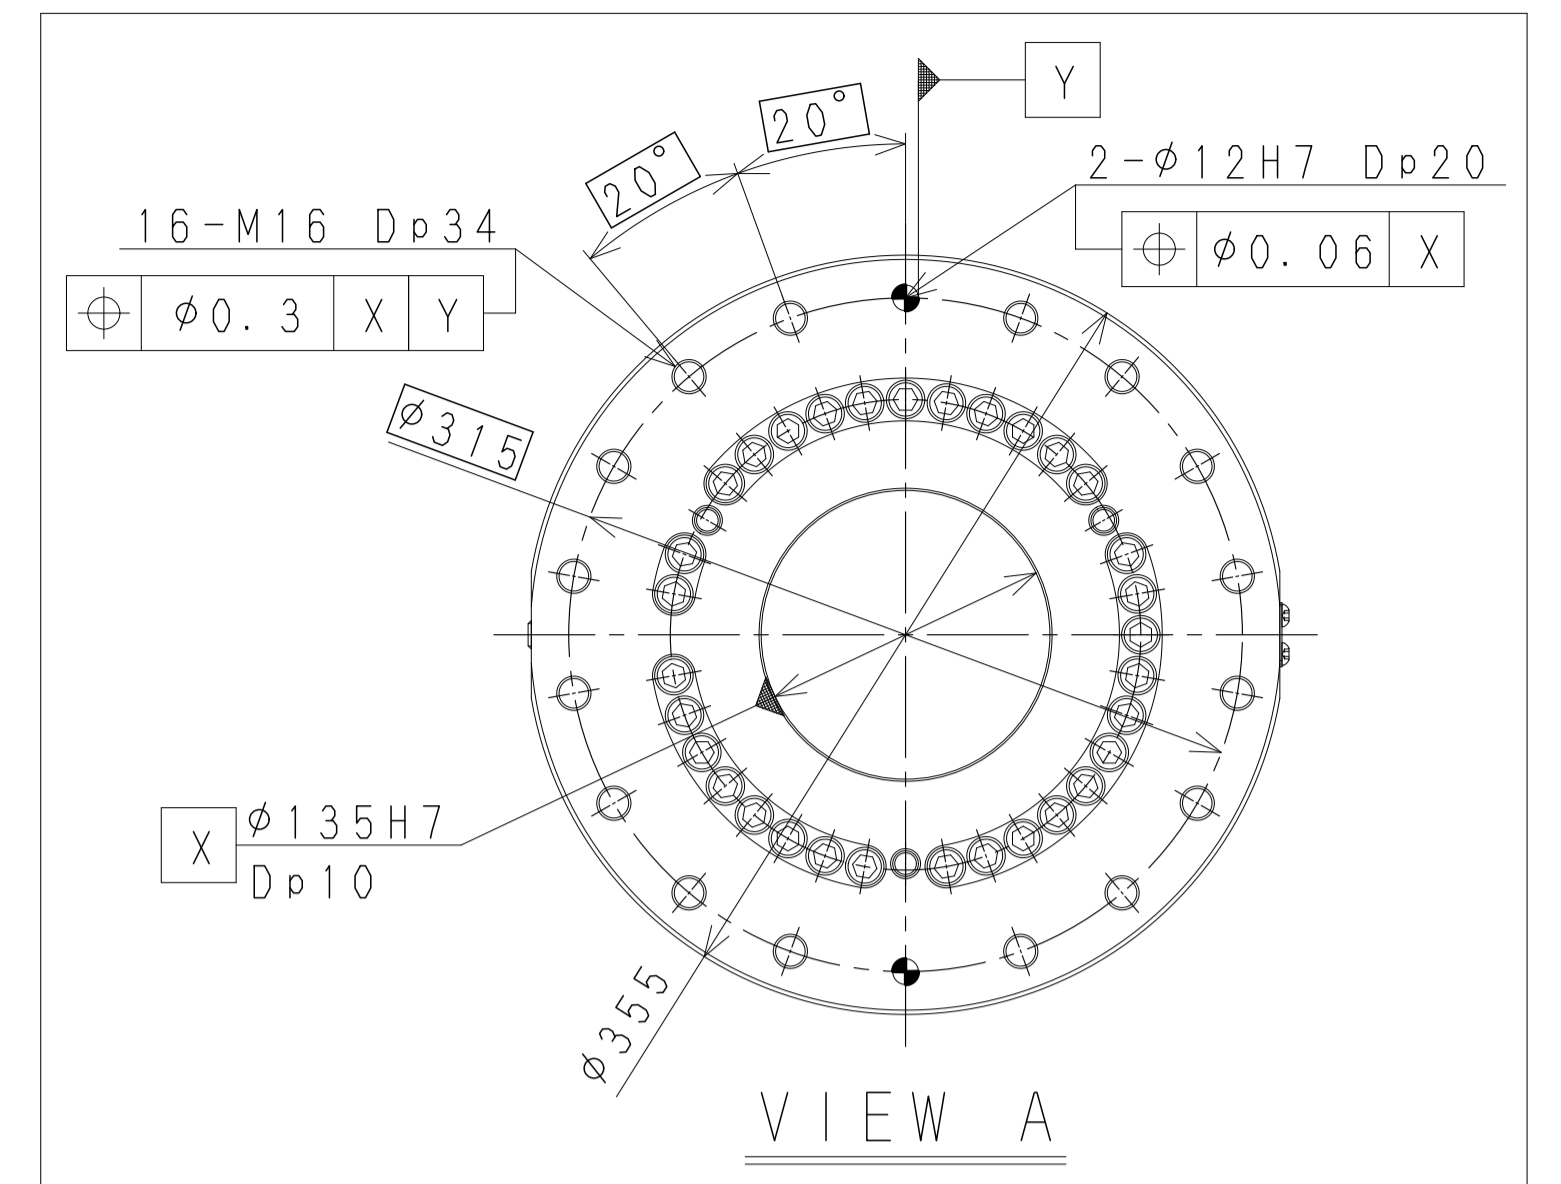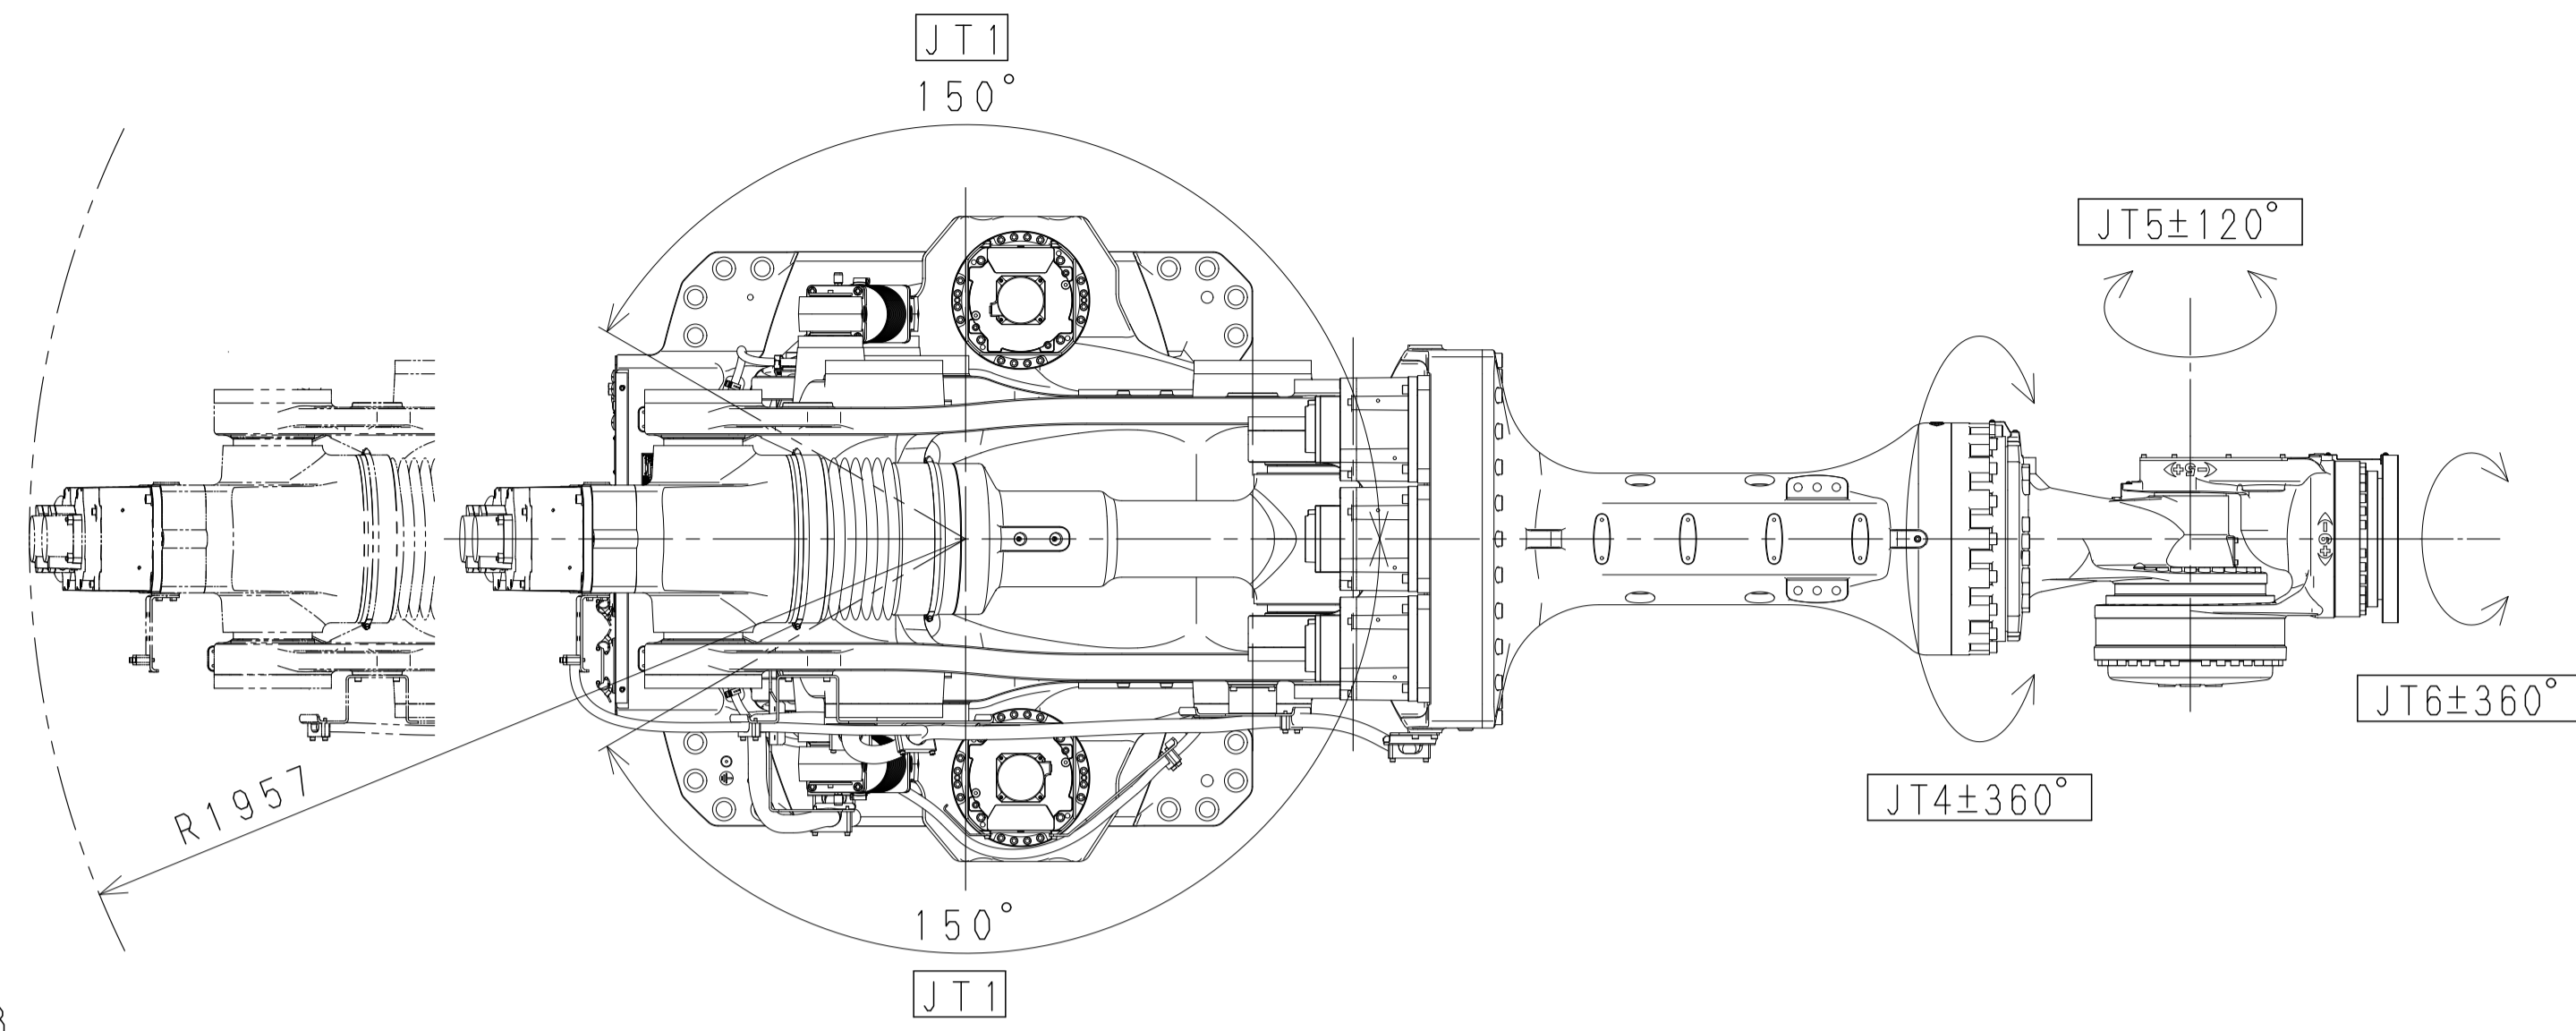


Working range based on point P

MG10HL-B
WORKING RANGE


E58 CONTROLLER

MASS:165kg (without primary power trans.)


MASS:215kg (with primary power trans.)

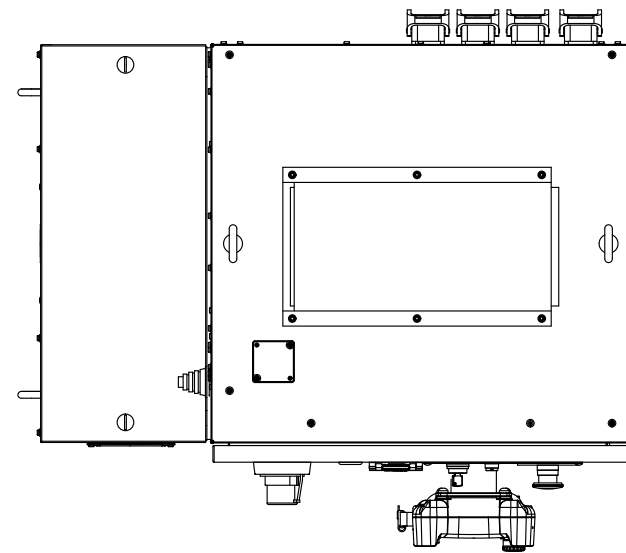


TOP VIEW

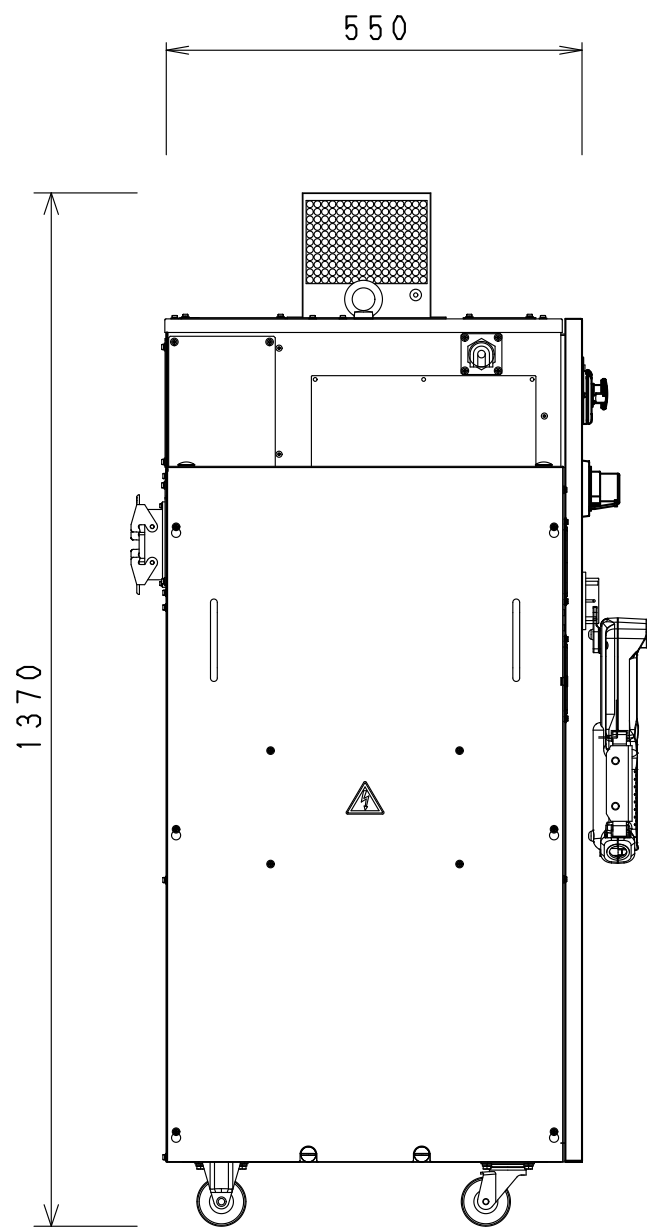


SIDE VIEW

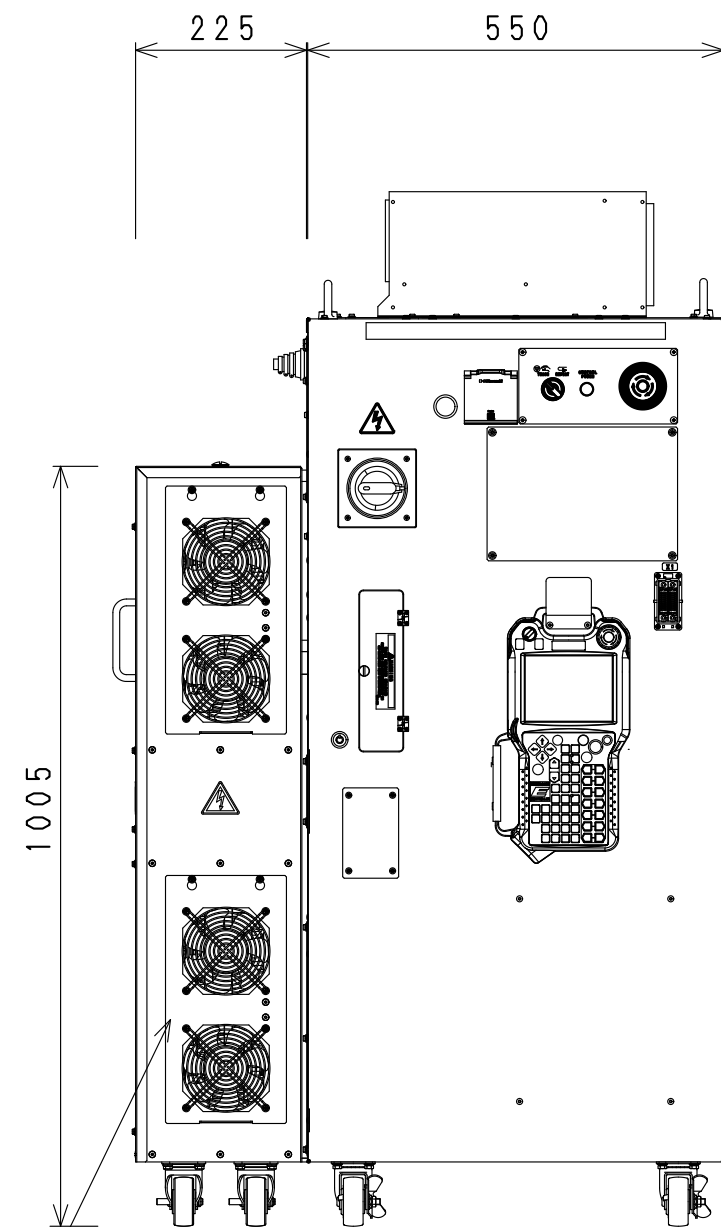

FRONT VIEW
Transformer FAN
(for primary power transformer spec.)

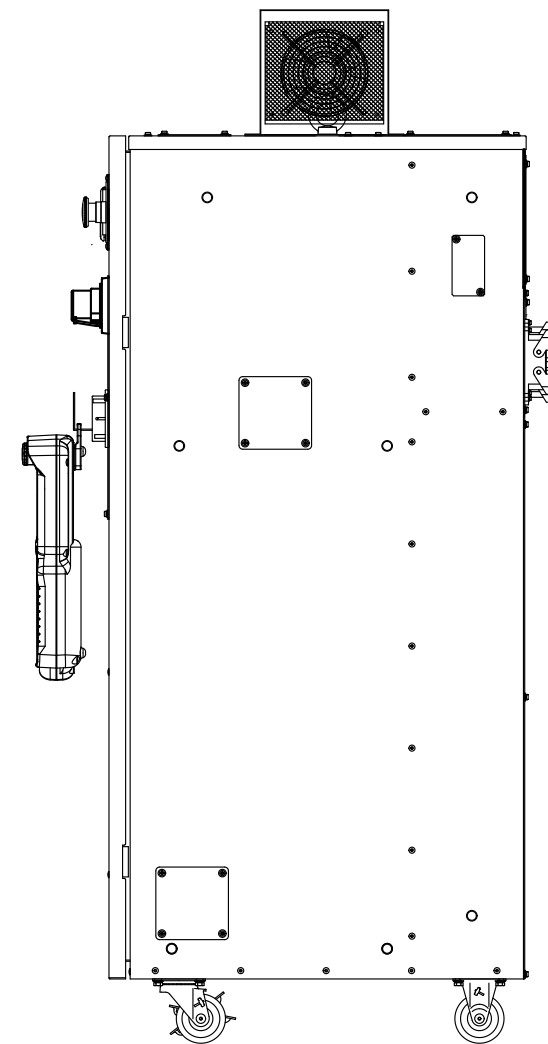

SIDE VIEW

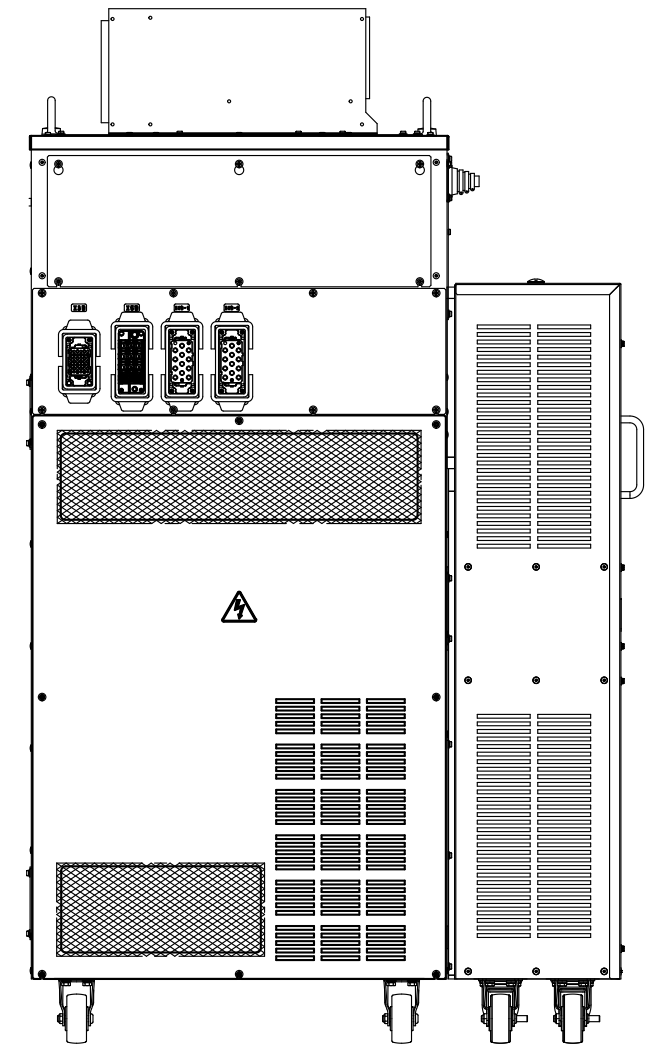

REAR VIEW