

Standard specifications

MS005NGF60001

1st Edition : May 25, 2017

2st Edition : July 31, 2017

KAWASAKI HEAVY INDUSTRIES, LTD.

ROBOT DIVISION

Specification :	90101-2704DEB
(Arm) :	90151-0082DEA
(Controller) :	90152-0049DEB

[1] Robot Arm			
1. Model	MS005N-B00x		
2. Name	MSR05N		
3. Type	Articulated robot		
4. Degree of freedom	7 axes		
5. Axis specification	Operating axis	Max. operating range	Max. speed
	Shoulder rotatic (JT1)	+180° ~ -180°	130°/s
	Shoulder out-in (JT2)	+135° ~ -90°	130°/s
	Arm up-down (JT3)	+120° ~ -120°	215°/s
	Wrist swivel (JT4)	+180° ~ -180°	300°/s
	Wrist bend (JT5)	+115° ~ -115°	300°/s
	Wrist twist (JT6)	+180° ~ -180°	480°/s
	Arm rotation (JT7)	+180° ~ -180°	215°/s
6. Repeatability	±0.10 mm (at the tool mounting surface)		
7 Max. payload	5 kg		
8 Max. speed	6600 mm/s (at the center of tool mounting surface) * It isn't linear motion speed		
9. Load capacity of wrist		Max. torque	Moment of inertia*
	JT4	17.0 N·m	0.90 kg·m ²
	JT5	17.0 N·m	0.90 kg·m ²
	JT6	7.0 N·m	0.40 kg·m ²
	Note * Each value in this table shows allowable moment of inertia of JT4/JT5/JT6 when max. allowed torque is applied to each axis. If more detailed data is required for your application, please contact Kawasaki.		
10. Driving motor	Brushless AC Servomotor		
11. Working range	See attached drawing		
12. Mass	50 kg (without options)		
13. External facing	Mirror-finished Stainless steel (316L equivalent)		
14. Installation	Floor mounting		
15. Environment cond.	(Temperature) 10 ~ 35 °C, (Humidity) 35 ~ 85 %, no dew, nor frost allowed		
16. Cleanliness	ISO Class 5		
17. Degree of protection	IP69K (except connectors box)		
18. Built-in utilities			
19. Overhaul intarval	15000Hours (Conditonal interval: 20000Hours)		
20. Options			
21. Others	Consult Kawasaki about maintenance parts and spare parts.		

[2] Controller		
1. Model	F60	
2. Enclosure	Protection level:IP20 Open structure / Direct cooling system *1	
3. Dimensions	See attached drawing	
4. Number of controlled axes	8 axes	
5. Servo control and drive system	Full Digital Servo System	
6. Type of control	Teach mode	Joint, Base, Tool, Fixed Tool (option) operation mode
	Repeat mode	Joint, Linear, Circular (option) interpolation
7. Teaching method	Teaching or AS language programming	
8. Memory capacity	16 MB	
9. External operation signals	External Emergency stop, External Hold, etc.	
10. Number of Option board slots	2 slots	
11. Operation panel	Teach/Repeat SW, Emergency Stop SW	
12. Communication I/F	Ethernet (1000BASE-T/100BASE-TX/10BASE-T)	2port
	USB2.0	3port
	RS-232C	2port
13. Mass	See attached drawing	
14. Power requirement	AC200 V - AC230 V±10%, 50/60 Hz, 1 phases, Max. 2.0 kVA	
15. Ground	Less than 100 Ω (robot dedicated ground) Leakage current: max. 100 mA	
16. Ambient temperature	0 - 45°C	
17. Relative humidity	35 - 85 % (non-condensation)	
18. Color	Munsell: 5Y8.5/1 equivalent	
19. Teach Pendant	TFT color display (5.7 inch LCD) with touch panel Emergency Stop SW, Teach Lock SW and Enable SW	
20. Safety Circuit	Category: 4, Performance Level: e (EN ISO13849-1) *2	
21. Number of General purpose I/O signals	IN:16 OUT:16 with an I/O connector. (50pin with cover)	
22. Standard Options		
TP sheet language	English or Japanese or Chinese	
Power/Signal cable	5m, 10m, 15m	
Teach Pendant cable	5m, 10m, 15m	
23. Other Options		
Number of additional I/O signals	Inside Controller	I/O board(IN:32 OUT:32) ...up to 2 boards
	Remote I/O	Remote I/O unit(IN:32 OUT:32) ...up to 4 units
	Total max I/O number	IN:128 OUT:128
Enclosure	Enclosed structure / Indirect cooling system (Ambient temperature 0 - 45 °C) *3	
Motor brake release	Manual brake release switch BOX	
PC cable (RS-232C)	1.5 m, 3 m	
Extended safety functions	Cubic-S(Motion area monitoring, Joint monitoring, Speed monitoring etc.) *3	
Teach Pendant option	Connector for TP less	
Fast check mode	Fast check mode Switch	
Others	Field BUS, Software PLC, Analog input/output, Conveyor Synchronization, Bluetooth	
24. Others	Consult Kawasaki about maintenance parts and spare parts.	

NOTE*1

Cooling of the electronic components in this open construction F60 controller is achieved by circulation of ambient air

The enclosure is designed to protect personnel from coming in contact with hazardous parts inside the controller

There is no protection to less than 10 mm of alien substance and water.

Please consider ①② and ③ and select the option about protection to the environmental specification

①There is no or few non-conductive dusts & particles(influence for the controller is little) ...Option is not needed.

②There is high possibility that non-conductive dusts & particle will get into controller...Select the option Intake Filter or Enclosed structure

③There is high possibility that conductive dusts & particle will get into controller. ...Select the option Enclosed structure




NOTE*2

Category and Performance level (PL) are determined by the whole system and conditions


The safety circuit of this controller is available in the system of category: up to 4, PL: up to e

NOTE*3

Attaching additional unit makes size of a controller larger.

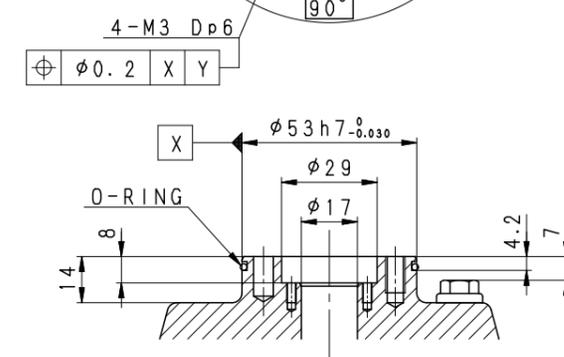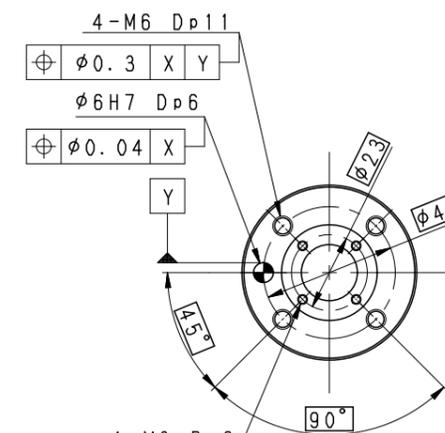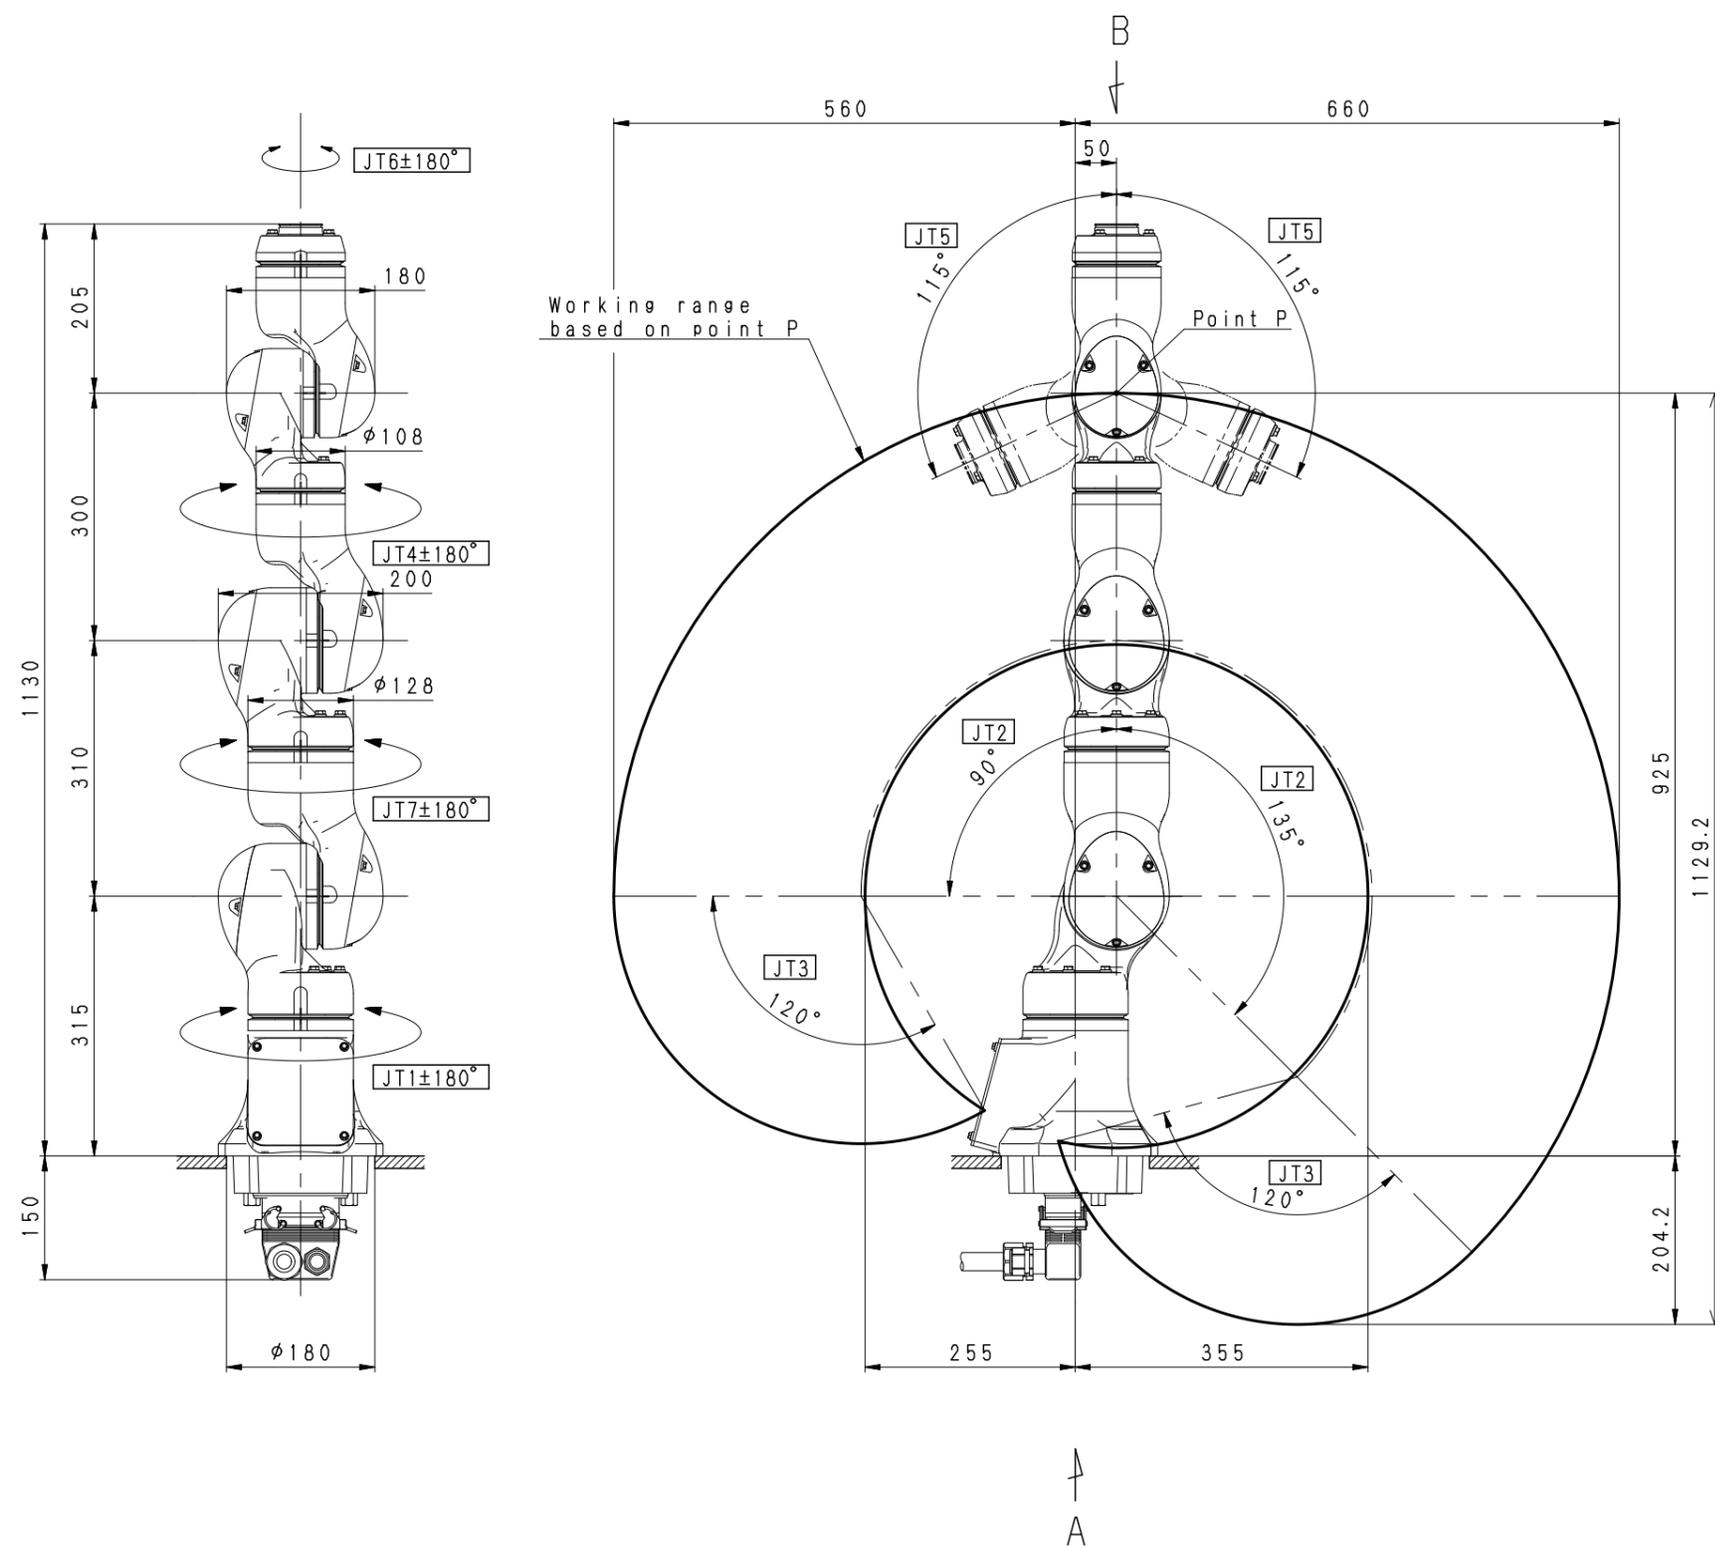

VIEW B

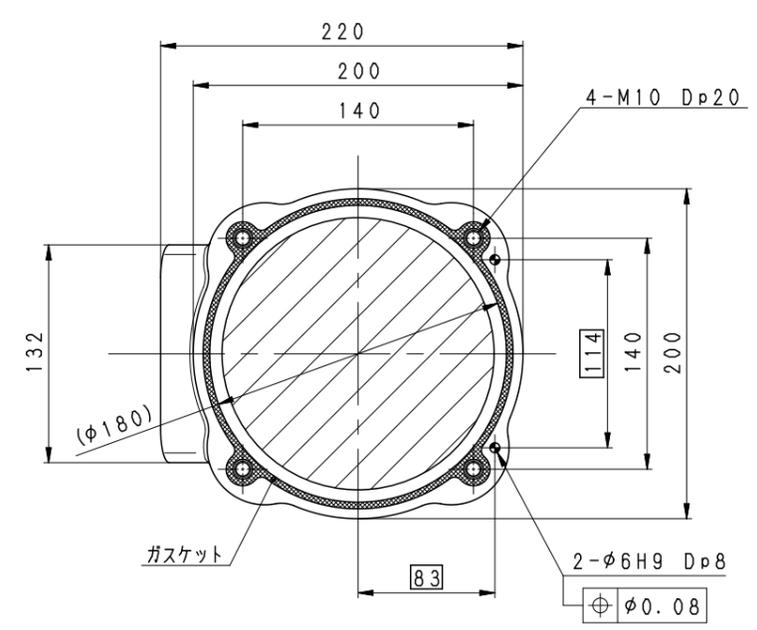


VIEW A
(Installation Dimensions)

MSR05n
 WORKING RANGE


F60 CONTROLLER

(8 axes specification)


MASS: 8.7Kg (Without any options)

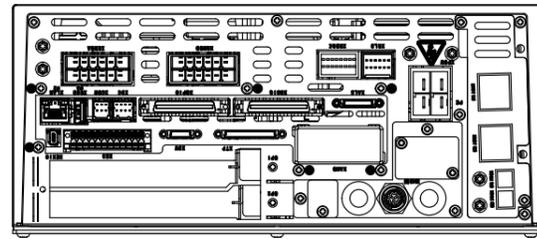


REAR VIEW

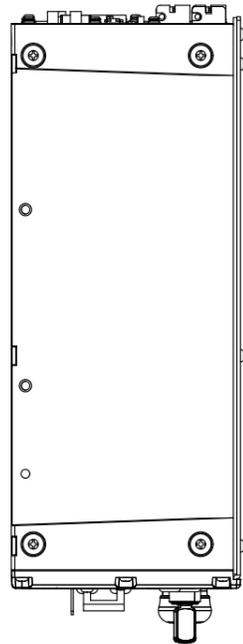


SIDE VIEW

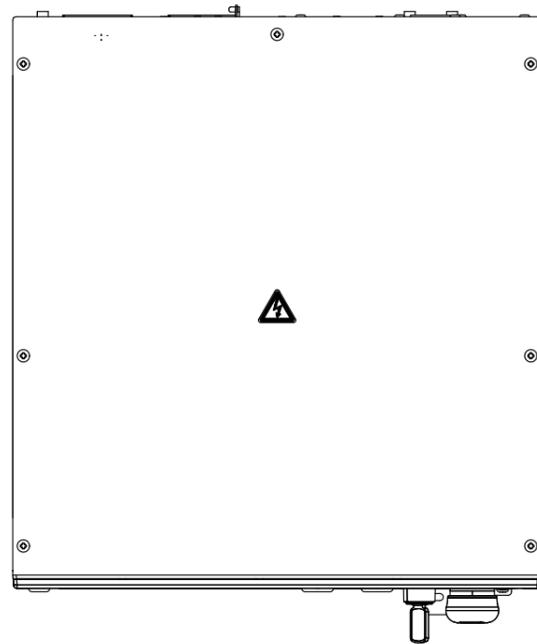

TOP VIEW


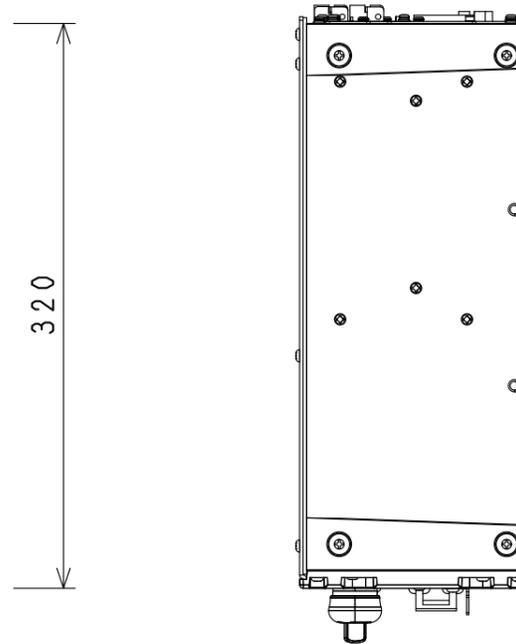


SIDE VIEW


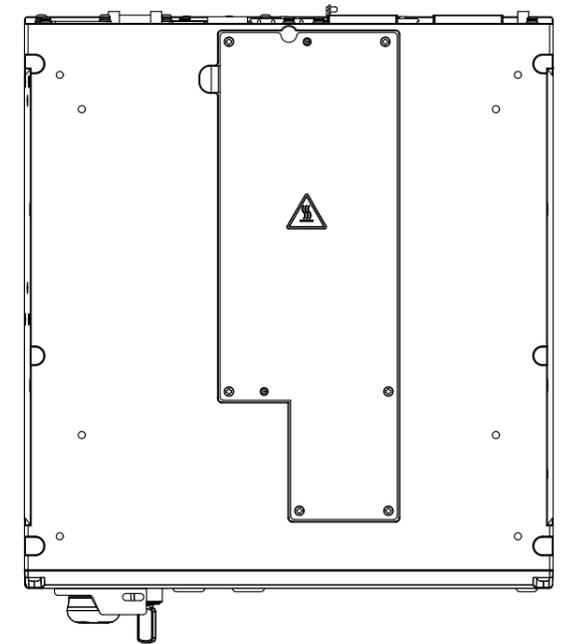


BOTTOM VIEW


Vertical Mount

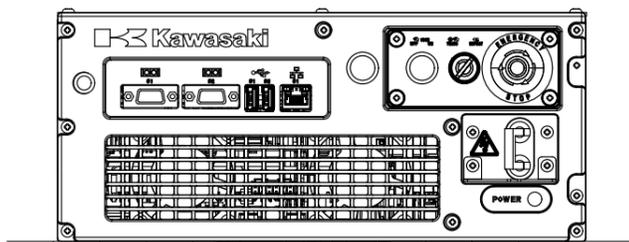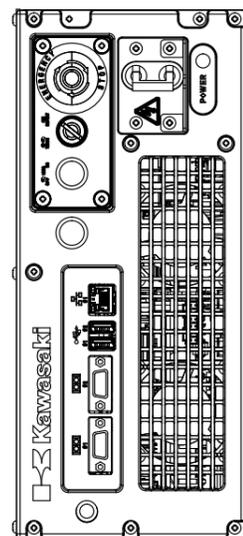


FRONT VIEW

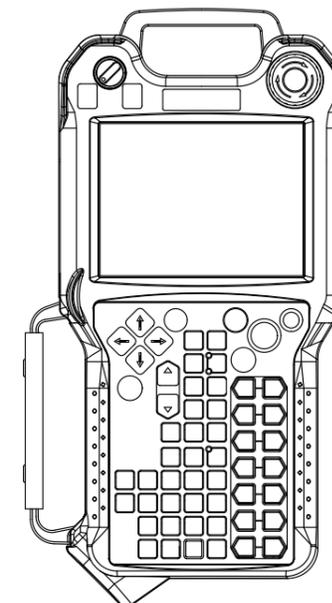

① Open Structure
Standard

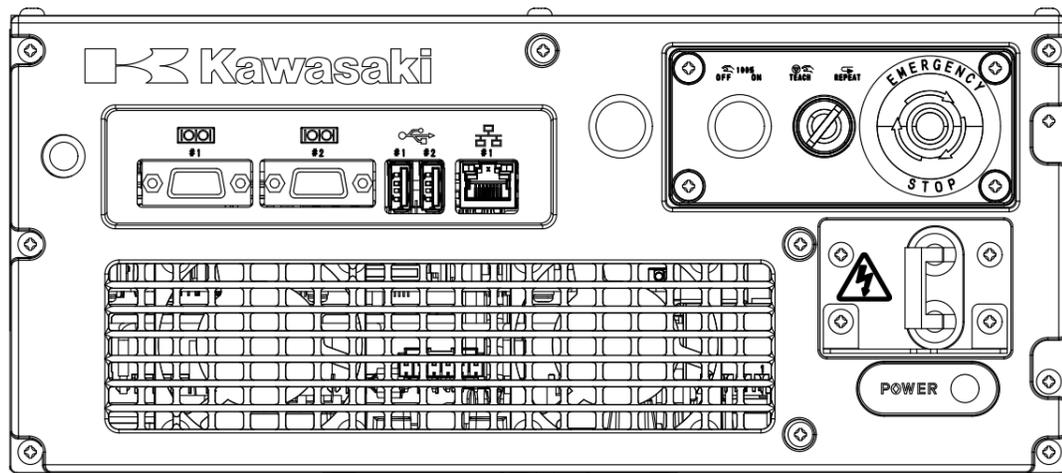


② Open Structure
With Intake Filter

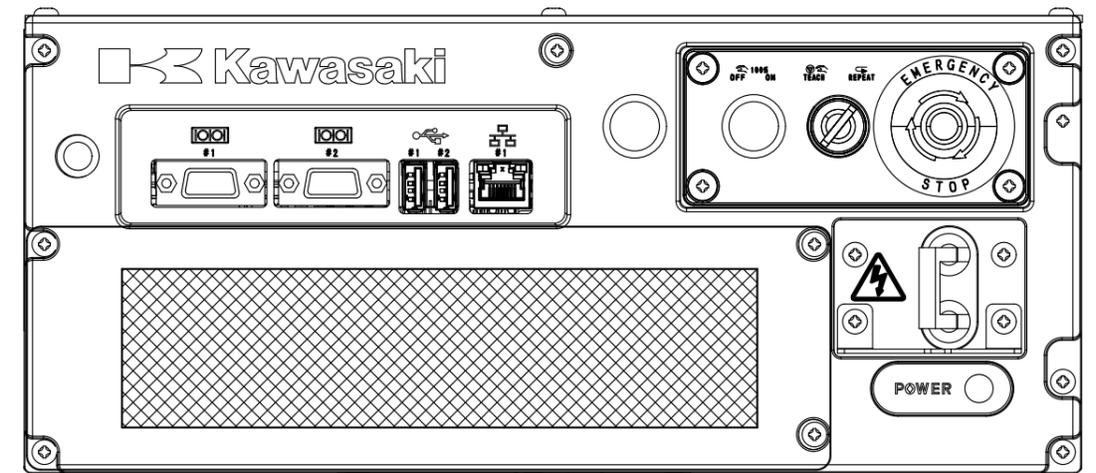


③ Enclosed Structure

F60 CONTROLLER


MASS: 16Kg
(With Enclosed Structure option)

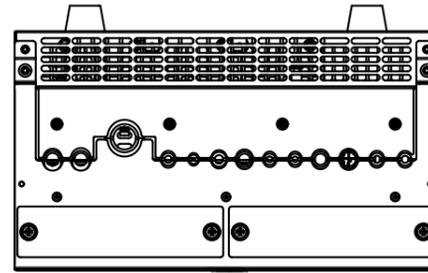

REAR VIEW

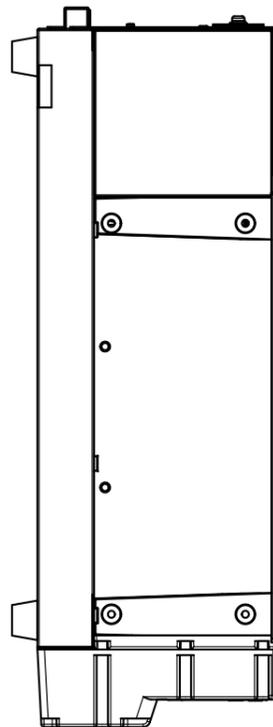


SIDE VIEW

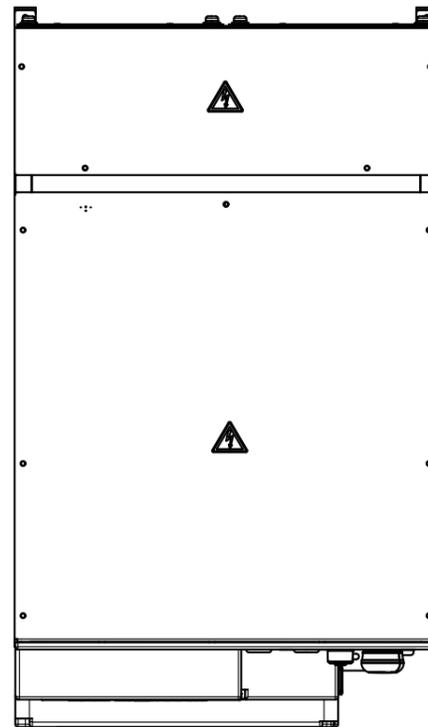


TOP VIEW



500


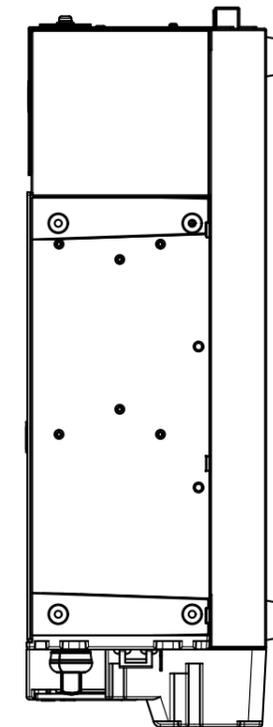


SIDE VIEW

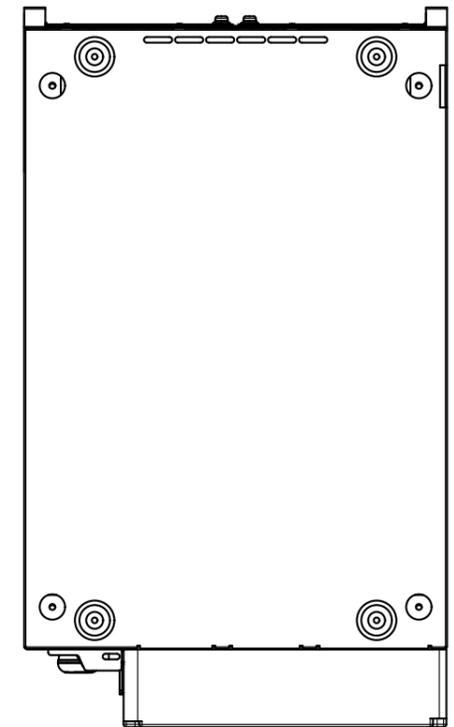


BOTTOM VIEW

Vertical Mount

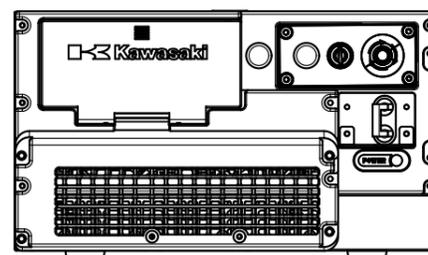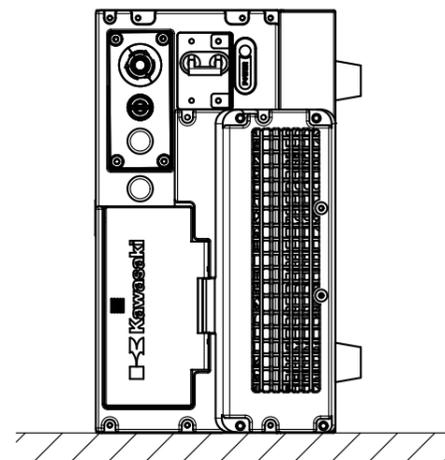

FRONT VIEW



170

188

18

300